


# INSEXSKRUV UNC/UNF

Serie 1960/1936

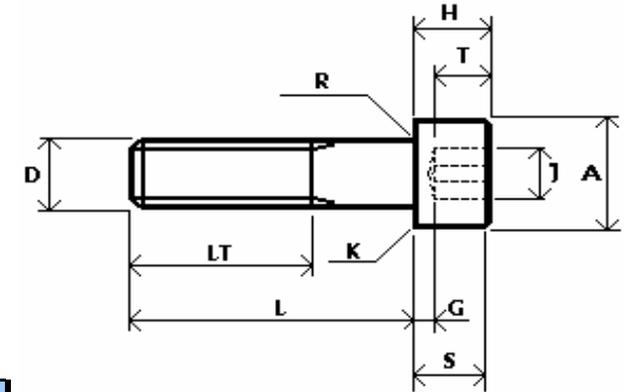

Gångor per tum		DIM	D		1960 A		1936 A		H		S Min	1960 J		1936 J		T Min	G Min	R		K Max	LT Min
UNC	UNF		Max	Min	Max	Min	Max	Min	Min	Max		Nom	Nom	Min	Min	Max	Min	Max	Min	Max	Min
-	80	0	0.06	0.0568	0.096	0.091	0.096	0.093	0.06	0.057	0.054	0.05	0.05	0.025	0.019	0.007	0.003	0.003	0.003	0.5	
64	72	1	0.073	0.0695	0.118	0.112	0.118	0.114	0.073	0.07	0.066	1/16	0.05	0.031	0.023	0.007	0.003	0.003	0.003	0.625	
56	64	2	0.086	0.0822	0.14	0.134	0.14	0.136	0.086	0.083	0.077	5/64	1/16	0.038	0.028	0.008	0.004	0.003	0.003	0.625	
48	56	3	0.099	0.0949	0.161	0.154	0.161	0.157	0.099	0.095	0.089	5/64	5/64	0.044	0.032	0.008	0.004	0.003	0.003	0.625	
40	48	4	0.112	0.1075	0.183	0.176	0.183	0.178	0.112	0.108	0.101	3/32	5/64	0.051	0.036	0.009	0.005	0.005	0.005	0.75	
40	44	5	0.125	0.1202	0.205	0.198	0.205	0.2	0.125	0.121	0.112	3/32	3/32	0.057	0.04	0.01	0.006	0.005	0.005	0.75	
32	40	6	0.138	0.1329	0.226	0.218	0.226	0.221	0.138	0.134	0.124	4/64	3/32	0.064	0.044	0.01	0.006	0.005	0.005	0.75	
32	36	8	0.164	0.1585	0.27	0.262	0.27	0.265	0.164	0.159	0.148	9/64	1/8	0.077	0.052	0.012	0.007	0.005	0.005	0.875	
24	32	10	0.19	0.184	5/16	0.303	5/16	0.306	0.19	0.185	0.171	5/32	5/32	0.09	0.061	0.014	0.009	0.005	0.005	0.875	
20	28	1/4	0.25	0.2435	3/8	0.365	3/8	0.367	1/4	.233	0.225	3/16	3/16	0.12	0.08	0.014	0.009	0.008	0.008	1	
18	24	5/16	0.3125	0.3053	15/32	0.457	7/16	0.429	5/16	.306	0.281	1/4	7/32	0.151	0.1	0.017	0.012	0.008	0.008	1.125	
16	24	3/8	0.375	0.3678	9/16	0.55	9/16	0.553	3/8	.368	0.337	5/16	5/16	0.182	0.12	0.02	0.015	0.008	0.008	1.25	
14	20	7/16	0.4375	0.4294	21/32	0.642	5/8	0.615	7/16	.43	0.394	3/8	5/16	0.213	0.14	0.023	0.018	0.01	0.01	1.375	
13	20	1/2	0.5	0.4919	3/4	0.735	3/4	0.739	1/2	.492	0.45	3/8	3/8	0.245	0.16	0.026	0.02	0.01	0.01	1.5	
11	18	5/8	0.625	0.6163	15/16	0.921	7/8	0.863	5/8	.616	0.562	1/2	1/2	0.307	0.2	0.032	0.024	0.01	0.01	1.75	
10	16	3/4	0.75	0.7406	1.1/8	1.107	1	0.987	3/4	.74	0.675	5/8	9/16	0.37	0.24	0.039	0.03	0.01	0.01	2	
9	14	7/8	0.875	0.8647	1.5/16	1.293	1.1/8	1.111	7/8	.864	0.787	3/4	9/16	0.432	0.28	0.044	0.034	0.015	0.015	2.25	
8	14	1	1	0.98861	1.1/2	1.479	1.5/16	1.297	1	.988	0.9	3/4	5/8	0.495	0.32	0.05	0.04	0.015	0.015	2.5	
7	12	1 1/8	1.125	1.1086	1.688	1.665	1.5		1.125	1.111	1.012	7/8	3/4	0.557	0.428				0.015		
7	12	1 1/4	1.25	1.2336	1.875	1.852	1.75		1.25	1.236	1.125	7/8	3/4	0.62	0.475				0.015		
6	12	1 3/8	1.375	1.3568	2.062	2.038	1.875		1.375	1.36	1.237	1	3/4	0.682	0.523				0.015		
6	12	1 1/2	1.5	1.4818	2.25	2.224	2		1.5	1.485	1.35	1	1	0.745	0.57				0.015		
5	-	1 3/4	1.75	1.7295	2.625	2.597	2.5		1.75	1.734	1.575	1 1/4	1 1/4	0.87	0.665				0.015		
4 1/2	-	2	2	1.978	3	2.97			2	1.983	1.8	1 1/2	1 3/5	0.995	0.76				0.015		

**SWEBOLT AB** Box 2029 17602 Järfälla Sweden

Phone: +46 (0)8 - 584 909 60 Fax: +46 (0)8 - 583 581 82 E-mail: info@swebolt.se Web: www.swebolt.se